


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Samuel W. Lackland, under contract number 415, approved March 10, 1882.

Record states: Set Basalt Stone 18x9x9 ins., 12 ins. in ground for 1/4 Sec. Cor., marked 1/4 on N. face. Raised mound of stone.

Township 12 South, Range 30 East
R-3

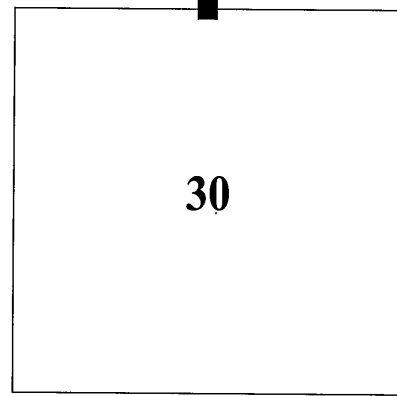

Subsequent survey:

Corner reestablished by Douglas M. Ferguson, LS 848, as described by Corner Record filed August 29, 1983, in the office of the Grant County Surveyor.

Record states:

No evidence found. Logging in area has destroyed all traces.

Set position by proportion.

No accessories originally established.

Set a 30" x 2" aluminum pipe with 3 1/2" aluminum cap, stamped as shown in diagram. Set monument 27" in ground.

From which:

A Pine 16" dia. bears N72°W 6.0 ft. scribed 1/4S19BT.

A Pine 14" dia. bears S48°W 25.6 ft. scribed 1/4S30BT.


Description of evidence found:

Found an aluminum pipe, 2 1/2 ins. diam., firmly set, projecting 3 ins. above the ground, with aluminum cap mkd. as shown.

From which bearing trees by Ferguson:

A ponderosa pine, 22 ins. diam., alive and healthy, bears S. 48° W., 25.6 ft. dist., with healed blaze.

A ponderosa pine, 25 ins. diam., alive and healthy, bears S. 42° W. (Record N.72°W.), 6.0 ft. dist., with healed blaze.




Description of monument and accessories established to perpetuate the location of this corner.

Bearings are made with hand compass, declination 14° E.

I hereby certify that the above corner point was perpetuated as herein described on 7/7/2021.

Witnessed by:
Matt Brockamp, PLS
Austin Brockamp

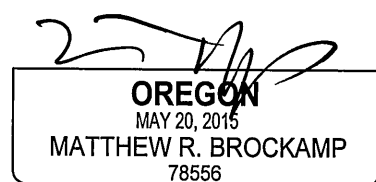

Registration expires 12/31/2021

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

NOV 29 2021

By:

