

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner set by Samuel W. Lackland, under contract number 415, approved March 10, 1882.
Record states:
Set Basalt Stone 17x12x8 ins., 13 ins. in ground for ¼ Sec. Cor. marked ¼ on N. face. Raised mound of stone alongside.

Subsequent survey:

Corner reestablished by Douglas M. Ferguson, LS 848, as described by Corner Record filed August 29, 1983, in the office of the Grant County Surveyor.
Record states:
No evidence found. Set corner by proportion.
Set a 30"x2" aluminum pipe with a 3½" aluminum cap stamped as shown in diagram.
Set 25" in ground.
From which:
A Fir 11 dia. bears S70°W 20.6 ft. scribed ¼ S28 B.T.
A Pine 8" dia. bears N19°W 10.7 ft. scribed ¼ S21 B.T.

Description of evidence found:

Found an aluminum pipe, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. as shown.
From which bearing trees by Ferguson:
A fir stump, deteriorated remains, S. 70° W., 20.6 ft. dist.
A ponderosa pine, 12 ins. diam., bears N. 19° W., 10.7 ft. dist., with healed blaze.

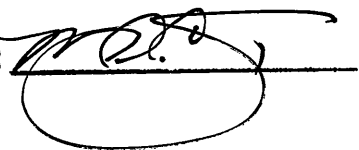
Description of monument and accessories established to perpetuate the location of this corner.

New bearing trees:
A fir, 7 ins. diam., bears N. 50° E., 10.3 ft. dist., scribed X BT.
A fir, 6 ins. diam., bears S. 19° E., 23.8 ft. dist., scribed X BT.
A fir, 7 ins. diam., bears S. 42° W., 8.8 ft. dist., scribed 1/4S28 BT.

Bearings are made with hand compass, declination 14° E.

I hereby certify that the above corner point was perpetuated as herein described on 7/1/2021.

Witnessed by:
Matt Brockamp, PLS
Austin Brockamp

RECEIVED AND FILED
GRANT COUNTY SURVEYOR
NOV 2 9 2021
BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
MAY 20, 2015
MATTHEW R. BROCKAMP
78556
Registration expires 12/31/2021

BROCKAMP LAND SURVEYING, LLC
www.brockamplandsurveying.com
Matt Brockamp, PLS
541-398-0384
matt@brockamplandsurveying.com
P.O. Box 553
Wallowa, OR 97885
Full Service Land Survey Firm

