

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Douglas M. Ferguson, LS 848, as described by Corner Record filed August 29, 1983, in the office of the Grant County Surveyor.

Record states:

Corner not previously established.


Set a 30"x2" aluminum pipe with a 3½" aluminum cap stamped as shown in diagram. Set 20" in ground.

From which:

A Juniper 8" dia. bears S50°W, 3.5 ft. scribed E1/16 S26 BT.

A Juniper 5" dia. bears N63°E, 10.9 ft. scribed E1/16 S23 BT.

Township 12 South, Range 30 East
R-20

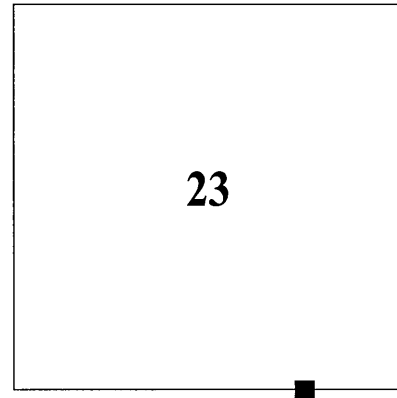

Subsequent survey:

None.


Description of evidence found:

Found an aluminum pipe, 2½ ins. diam., firmly set, projecting 10 ins. above the ground, in a mound of stone, 3 ft. base to top with aluminum cap mkd. as shown.

From which bearing trees by Ferguson:

A juniper, 5 ins. diam., dead and down, bears N. 63° E., 10.9 ft. dist., with visible scribe on open blaze.

A juniper, 9 ins. diam., alive and healthy, bears S. 50° W., 3.5 ft. dist., with visible scribe on open blaze.



Description of monument and accessories established to perpetuate the location of this corner.

New bearing tree:

A fir, 13 ins. diam., bears N. 1° W., 25.3 ft. dist., scribed X BT.

Bearings are made with hand compass, declination 14° E.


I hereby certify that the above corner point was perpetuated as herein described on 6/18/2021.

Witnessed by:

Matt Brockamp, PLS

Austin Brockamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

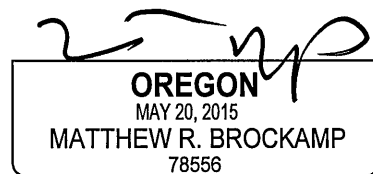

Registration expires 12/31/2021

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

NOV 29 2021

