


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

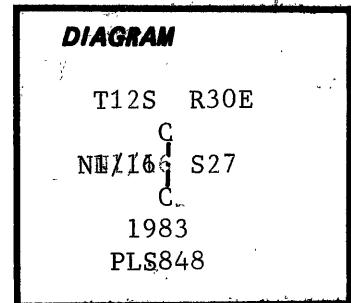

Description of corner evidence found:

Description of monument and accessories | established to perpetuate the original location of this corner:

Set a 30"x2" aluminum pipe with a 3½" aluminum cap stamped as shown in diagram. on solid rock & raised a mound of stone to top of pipe.

From Which:

A Juniper 16" dia. bears S9°36'E, 88.6 ft. scribed CN1/16 S27 BT.

A Juniper 14" dia. bears N82½°E, 93.7 ft. scribed CN1/16 S27 BT.

Set steel posts with warning & boundry signs East 6 ft. & West 2 ft. from corner.

Nailed brass washers stamped PLS848, bearing tree & warning signs to each tree.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Corner monumented 5-11883

Witnessed by Dan Martin

Office of.....Surveyor..... County of..... Grant
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 29th day of.....August....., 19.83.
Robert D. Begett by
(COUNTY OFFICIAL) (DEPUTY)