


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Douglas M. Ferguson, LS 848, as described by Corner Record filed August 29, 1983, in the office of the Grant County Surveyor.
Record states:
Corner not previously established.
Set a 30"x2" aluminum pipe with a 3½" aluminum cap stamped as shown in diagram. Set 26" in ground.
From which:
A Fir 6" dia. bears N68°E, 10.5 ft. scribed CE1/16 S26 BT.
A Fir 5" dia. bears S21°W, 7.5 ft. scribed X BT.

Township 12 South, Range 30 East
T-20

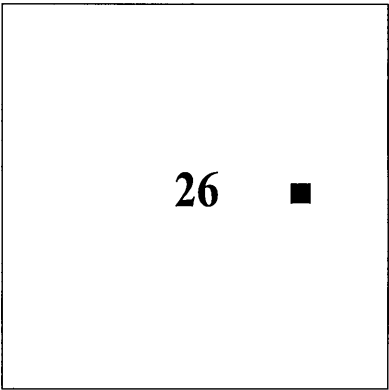


Subsequent survey:

None.

Description of evidence found:

Found an aluminum pipe, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, with aluminum cap mkd. as shown.
From which bearing trees by Ferguson:
A fir, 9 ins. diam., alive and healthy, bears N. 68° E., 10.5 ft. dist., with healed blaze.
A fir, 6 ins. diam., dead and down, bears S. 21° W., 7.5 ft. dist., with healed blaze.




Description of monument and accessories established to perpetuate the location of this corner.

New bearing tree:
A fir, 21 ins. diam., bears N. 32° W., 30.7 ft. dist., scribed X BT.

Bearings are made with hand compass, declination 14° E.

I hereby certify that the above corner point was perpetuated as herein described on 6/18/2021.

Witnessed by:
Matt Brockamp, PLS
Austin Brockamp

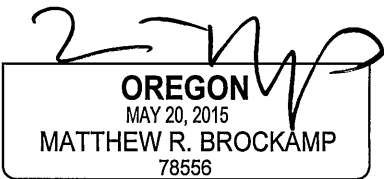

Registration expires 12/31/2021

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

NOV 29 2021

BROCKAMP LAND SURVEYING, LLC
www.brockamplandsurveying.com
Matt Brockamp, PLS
541-398-0384
matt@brockamplandsurveying.com
P.O. Box 553
Wallowa, OR 97885
Full Service Land Survey Firm