


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
CN1/16 Section 31, T12S, R30E, W.M.

History of original corner establishment:
NONE



Description of corner evidence found:
NONE

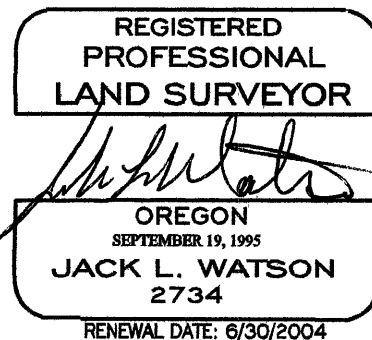

See Record Map of Survey No. 1645

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

A 12" Juniper bears S54°E, 8.2 feet, marked CN1/16S31BT.

A 10" Juniper bears N85°W, 31.7 feet, marked CN1/16S31BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Date: Sept. 10, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 2002.
Robert D. Dejean by _____
(COUNTY OFFICIAL) (DEPUTY)