

CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 Section 31, T12S, R30E, W.M.

History of original corner establishment:

This corner was established by Douglas Ferguson
August 22, 1991, see Survey No. 1185.

The corner position was corrected by Douglas Ferguson
in Sept., 1999, see Survey No. 1525. No monument was
set, an offset is shown from the monument to the corner
position.



Description of corner evidence found:


Found a 2½" alum. pipe with 3½" alum. cap, leaning north
0.3 ft., in a mound of stone from which I find BT's:

A 6" juniper bears N66°50'E, 18.8 ft., Rec=N58°45'E, 19.1 ft.

A 7" juniper bears S35°15'E, 34.7 ft., Rec=S33°15'E, 34.7 ft.

A 10" P. Pine bears N86°00'W, 34.9 ft., Rec=N84°45'W, 34.9 ft.

A 9" juniper bears N06°15'W, 31.4 ft., Rec=N04°30'W, 31.4 ft.

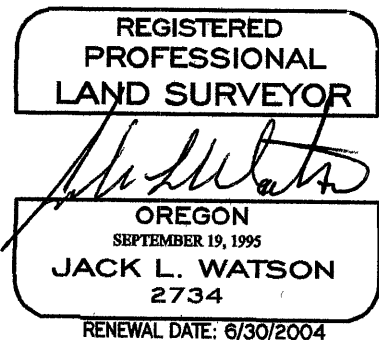

See Record Map of Survey No. 1645

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x15" iron pin with attached 2" aluminum cap, grouted into bedrock, built a mound of stone around cap. The cap is stamped as shown in the diagram.

From which:

A 6" Juniper bears N65°E, 17.1 feet, marked C1/4S31BT.

A 7" Juniper bears S31°E, 33.3 feet, marked C1/4S31BT.

A 10" P. Pine bears N83°W, 36.6 feet, marked C1/4S31BT.

A 9" Juniper bears N07°W, 31.6 feet, marked C1/4S31BT.

I used a steel tape measuring to an alum. nail in the face of the BT's and magnetic compass, with
18° E. declination.

Date: Sept. 10, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of Sept, 2002.
Robert Q. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)