



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Not Preveously Established

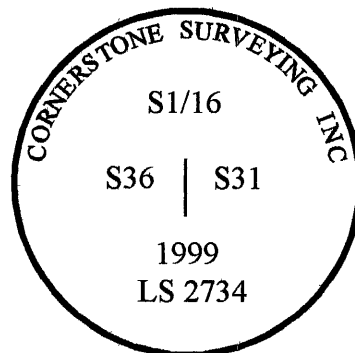

T12S, R30E, Section 31, S1/16 Corner

Description of corner evidence found:
Corner was not preveously established

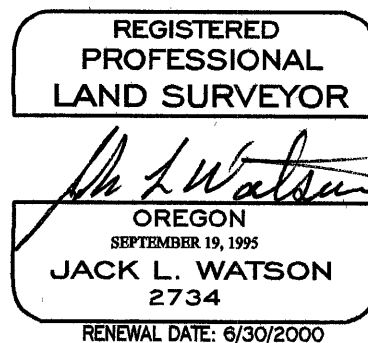

See Record Map of Survey No. 1530

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 10" iron pin grouted into bed rock with attached 2" aluminum cap, built small mound of stone around cap. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

A 12" Juniper bears N30°E, 19.25 feet, marked S1/16S31BT.

A 15" Juniper bears S81°W, 29.00 feet, marked S1/16S36BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 20° E. declination.

Date: September 2, 1999

Office of Surveyor County of Grant
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 3 day of Nov, 1999.
Robert D. Bennett by Robert D. Bennett
(COUNTY OFFICIAL) (DEPUTY)