


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David under GLO contract number 131 dated June 8, 1869. Surveyor General record states:

Set stone 20x14x10 for corner to Secs. 16,17,20 & 21

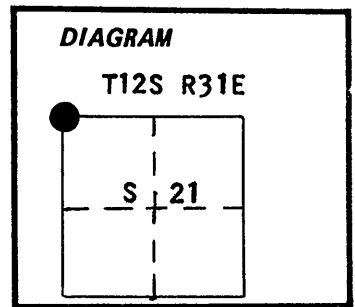

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

NONE

Area has been logged, with an old road across the corner position

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the

original location of this corner: At proportionate distance, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which:

New BTs


A 10 inch diameter Juniper bears N66°E 30.5 feet marked T12S R31E S16 BT
A 10 inch diameter Juniper bears S43°E 21.7 feet marked T12S R31E S21 BT
A 9 inch diameter Juniper bears S60°W 16.1 feet marked T12S R31E S20 BT
A 13 inch diameter P.Pine bears N64°W 25.5 feet marked T12S R31E S17 BT

Raised mound of stone around monument

Set steel fenceposts approximately 5 feet West and South with 54-2 signs and approximately 5 feet East with 54-2 and 54-4 signs attached

Corner set August 22, 1984

Witness: Mike Wagner

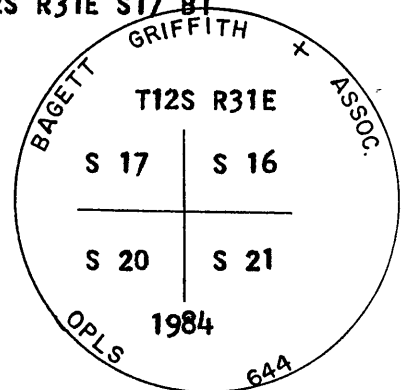

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*11* day of.....*Feb*....., 19.....*85*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)