


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established

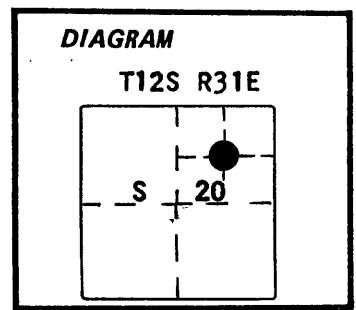

Description of corner evidence found:

NONE

See map of survey dated January 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At corner position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:




New BTs

A 11 inch diameter P.Pine bears S14°E 26.8 feet marked X BT
A 10 inch diameter P.Pine bears N61°W 14.5 feet marked NE 1/16 S20 BT

Raised mound of stone around monument

Set steel fenceposts approximately 5 feet North with 54-2 sign
and approximately 5 feet West with 54-2 and 54-9 signs attached

Corner set September 3, 1984

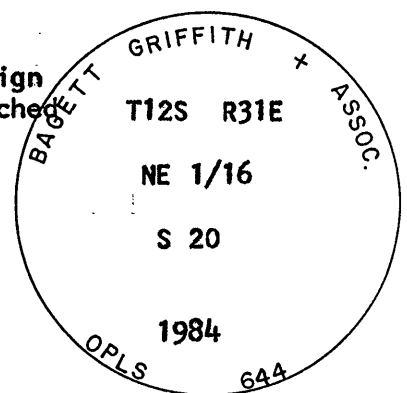

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*11* day of.....*Feb*....., 19*85*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)