


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David under GLO contract number 131 dated June 8, 1869. Surveyor General record states:

Set stone 17x12x8 for corner to Secs. 14,15,22 & 23

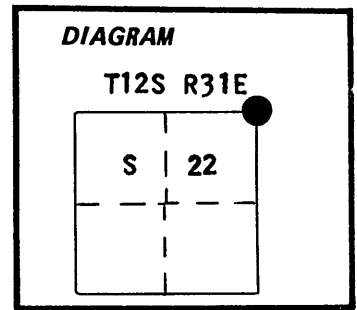

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

Found Stone 15x10x8 marked with 2 and 3 notches in small mound of stone
Stone is soft and crumbly

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: In place of the stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which:


New BTs

- A 11 inch diameter Juniper bears N49°E 26.6 feet marked T12S R31E S14 BT
- A 10 inch diameter P.Pine bears S23°E 48.5 feet marked T12S R31E S23 BT
- A 20 inch diameter P.Pine bears S60°W 34.0 feet marked T12S R31E S22 BT
- A 7 inch diameter mahogany bears N1°W 17.3 feet marked T12S R31E S15 BT

Buried the original stone North and alongside of monument
Raised mound of stone around monument

Set steel fencepost approximately 5 feet North with 54-4 sign attached

Corner set August 24, 1984
Witness: Mike Wagner

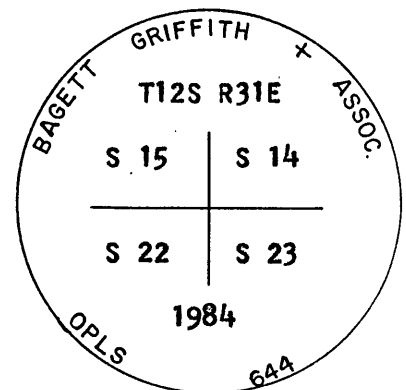

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*11*..... day of.....*Feb*....., 19.....*85*.....
Robert J. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)