


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established

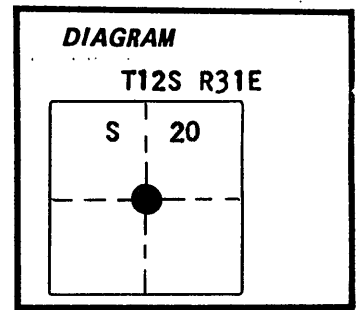

Description of corner evidence found:

NONE

See map of survey dated January 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At the corner position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which:

New BTs

A 17 inch diameter P.Pine bears S40°W 22.2 feet marked C¼ S20 BT


A 10 inch diameter Red Fir bears N76°W 43.4 feet marked C¼ S20 BT

Raised mound of stone around monument

Set steel fenceposts approximately 5 feet West with 54-2 sign and approximately 5 feet East with 54-2 and 54-9 signs

Corner set September 13, 1984

Witnesses: Greg Blackman and Rick Robinson and Mike Wagner

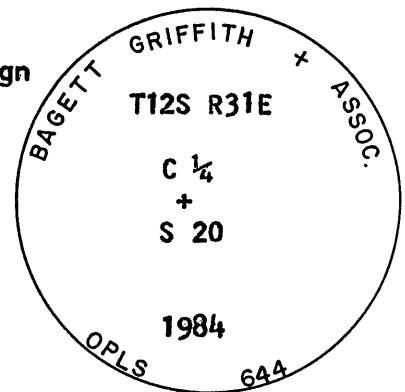

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*11*..... day of.....*Sept*....., 19.....*85*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)