


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established



Description of corner evidence found:

NONE

See map of survey dated January 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At the corner position I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which:

New BTs



A 16 inch diameter P.Pine bears N36°E 29.3 feet marked CW 1/16 S23 BT
A 14 inch diameter P.Pine bears N63°W 35.7 feet marked X BT

Raised mound of stone around monument


Set steel fenceposts approximately 5 feet East with 54-2 sign and approximately 5 feet South with 54-2 and 54-9 signs

Corner set September 18, 1984

Witnesses: Rick Robinson, Jack Watson and Mike Wagner

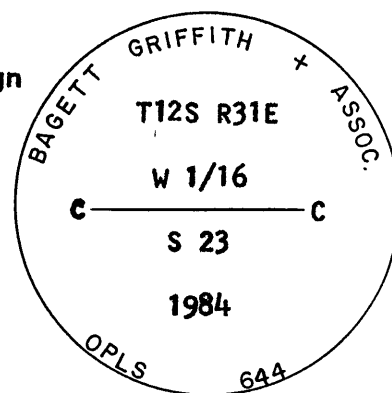

[Signature of Duane I. Griffith]



I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-9 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*4*..... day of.....*Feb*....., 19.....*85*.....
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)