


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David under GLO contract number 131 dated June 8, 1869. Surveyor General record states:

Set stone 16x10x5 for $\frac{1}{4}$ Sec corner

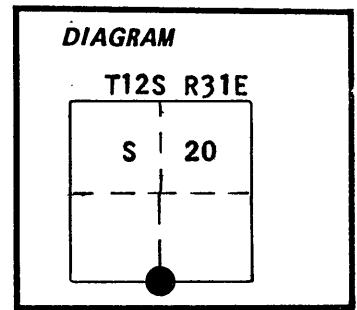

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

Found stone 16x10x5 marked $\frac{1}{4}$ in a sage bush

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a $2\frac{1}{2}$ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, from which:




New BTs

A 14 inch diameter Juniper bears S75°W 55.7 feet marked $\frac{1}{4}$ S29 BT
A 12 inch diameter Juniper bears N79°W 72.4 feet marked $\frac{1}{4}$ S20 BT

Buried the original stone East and alongside of the monument
Raised mound of stone around monument

Set steel fenceposts approximately 5 feet West with 54-2 sign
and approximately 5 feet North with 54-2 and 54-4 signs

Corner set August 23, 1984
Witness: Mike Wagner

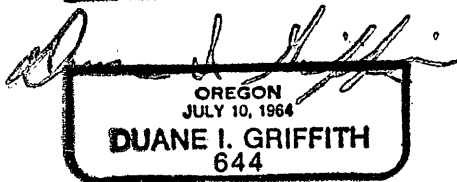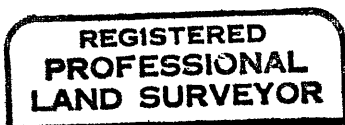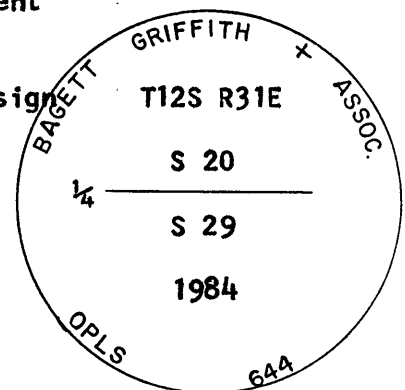

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*16*..... day of.....*Feb*....., 19.....*85*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)