


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David under GLO contract number 131 dated June 8, 1869. Surveyor General record states:

Set stone 18x10x5 for corner to Secs. 21,22,27 & 28



No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

Found stone 18x10x5 in small mound of stone marked with 3 and 2 grooves

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: In place of stone, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown 30 inches in the ground, from which:


New BTs

- A 11 inch diameter P.Pine bears N67°E 12.3 feet marked T12S R31E S22 BT
- A 14 inch diameter P.Pine bears S62°E 16.4 feet marked T12S R31E S27 BT
- A 12 inch diameter P.Pine bears S88°W 5.1 feet marked T12S R31E S28 BT
- A 14 inch diameter P.Pine bears N23°W 33.6 feet marked T12S R31E S21 BT

Buried the original stone East and alongside of monument
Raised small mound of stone around monument

Set steel fenceposts approximately 5 feet East with 54-2 sign and approximately 5 feet West with 54-2 and 54-4 sign

Corner set August 21, 1984
Witness: Mike Wagner

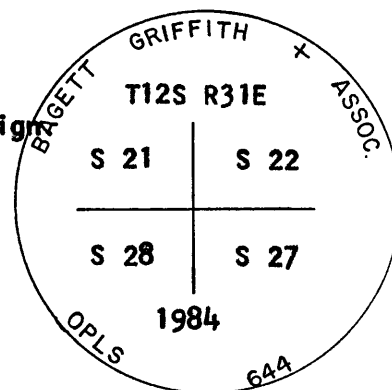

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*11* day of.....*Feb*....., 19.....*85*.....
Robert D. Dazett by.....
(COUNTY OFFICIAL) (DEPUTY)