


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David under GLO contract number 131 dated June 8, 1869. Surveyor General record states:

Set stone 14x10x8 for 1/4 Sec. corner

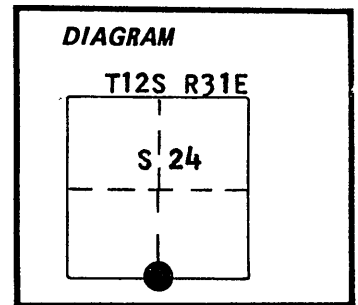

No record of subsequent remonumentation was found in the Grant County records

Description of corner evidence found:

NONE. Area has been logged

An existing fence corner with fences running North, East and West is approximately 25 feet East

See map of survey dated January, 1985

Description of monument and accessories I established to perpetuate the original location of this corner: At proportionate distance I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown 30 inches in the ground, from which:

New BTs

A 9 inch diameter P.Pine bears N47°E 19.6 feet marked 1/4 S24 BT


A 18 inch diameter R. Fir bears S28°E 17.1 feet marked 1/4 S25 BT

Raised small mound of stone around monument

Set steel fenceposts approximately 5 feet East with 54-2 sign and approximately 5 feet North with 54-2 and 54-4 sign attached

Corner set August 21, 1984

Witness: Mike Wagner

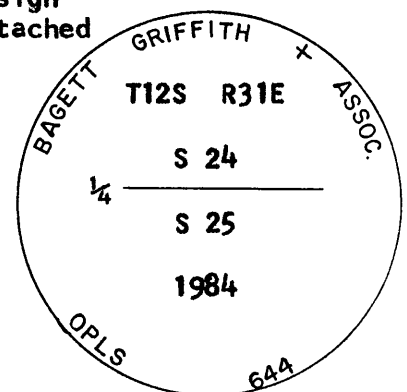

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination and the distance to the BTs are to the center of the tree. I set a brass washer marked OPLS 644 at the BT blaze. I painted a 6 inch red band around all BTs and attached 54-3 and 54-4 signs.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*11*..... day of.....*Feb*....., 19.....*85*.....
.....*Duane I. Griffith*..... by.....*Mike Wagner*.....
(COUNTY OFFICIAL) (DEPUTY)