



CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
NONE

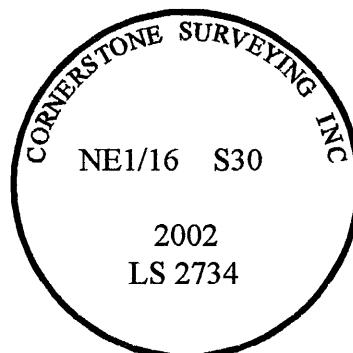

T12S,R31E,W.M.

Description of corner evidence found:
NONE

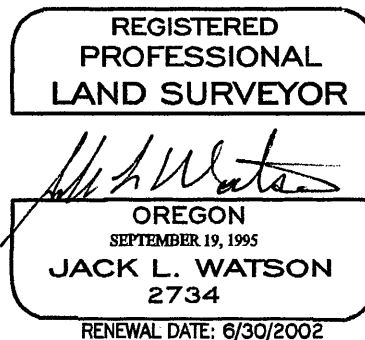

See Record Map of Survey No. 1623

Description of monument and accessories set at corner location:

At the corner position determined by survey I set a 5/8" x 30" iron pin with attached 2" aluminum cap, driven 18 inches in the ground, built mound of stone around cap. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

A 5" Juniper bears N24°E, 33.7 feet, marked XBT.

A 34" Juniper bears S30°W, 42.9 feet, marked NE1/16S30BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: January 11, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of JAN, 2002.
Robert D. Bayett by _____
(COUNTY OFFICIAL) (DEPUTY)