


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:



Original corner established by: John B. David, Deputy Surveyor, under Contract No. 131, dated June 8, 1869.

Record States: N89°54'E, 39.64 chs, Set stone 17x8x5 for 1/4 section corner.

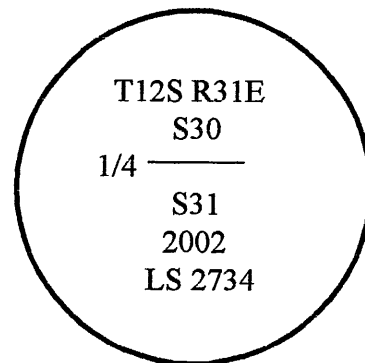

Description of corner evidence found:

No evidence of the original corner was found.

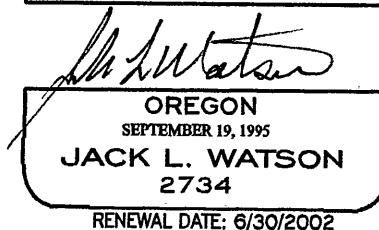

See Record Map of Survey No. 1623

Description of monument and accessories set at corner location:

At single proportionate position I set a 2 1/2"x30" aluminum pipe with attached 3" aluminum cap, 24 inches in the ground, surrounded by a mound of stone. An east-west fence is 1' south of the monument. The cap is stamped as shown in the diagram.

From which:

A 18" P. Pine bears N4°E, 22.4 feet, marked 1/4S30BT.

A 5" Juniper bears N83°E, 5.1 feet, marked XBT.

A 7" Juniper bears S59°E, 35.0 feet, marked 1/4S31BT.

A 7" P. Pine bears S52°W, 24.4 feet, marked 1/4S31BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 20° E. declination.

Date: January 17, 2002

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 25 day of JAN, 2002.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)