


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David, Deputy Surveyor, under Contract No.131, dated June 8, 1869.
Record States: North 80.00 chs, Set stone for corner to sections 30,31,25 & 36.

Retracement by: Samuel W. Lackland, under Contract No.415, dated August 19, 1881.
Record states: I Run North and at 79.88 chs found the section corner.

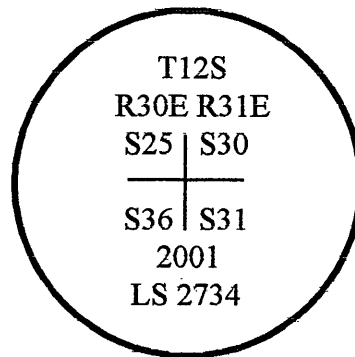

Description of corner evidence found:

After a diligent search I declare this corner lost. The original survey notes do not give the corner stone size.

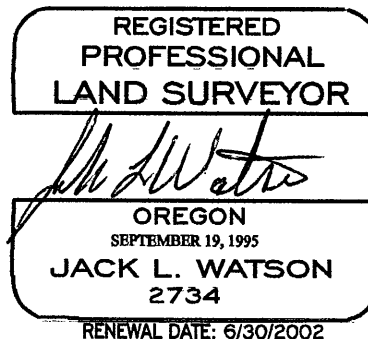

See Record Map of Survey No. 1601

Description of monument and accessories set at corner location:

At single proportionate position I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 10 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I scribe a new bearing trees:

- A 22" Juniper bears N72°E, 83.8 feet, marked T12SR31ES30BT.
- A 10" Juniper bears S79°E, 45.4 feet, marked T12SR31ES31BT.
- A 12" Juniper bears S79°W, 48.8 feet, marked T12SR30ES36BT.
- A 15" Juniper bears N64°W, 32.1 feet, marked T12SR30ES25BT.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 18° E. declination.

Date: July 12, 2001

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 18TH day of JULY, 2001.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)