


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: John B. David, Deputy Surveyor, under Contract No. 131, dated June 8, 1869.

Surveyor General Record States: Set stone 19x6x5 inches, for 1/4 section corner.

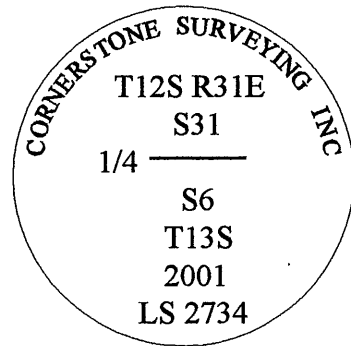

Description of corner evidence found:

No evidence of the original corner stone was found.

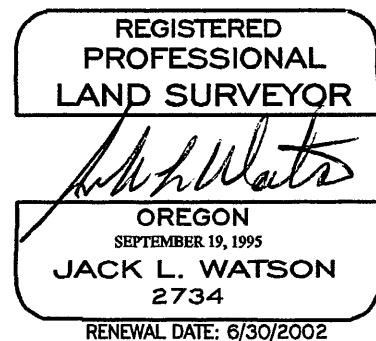

See Record Map of Survey No. 1610

Description of monument and accessories set at corner location:

At the proportionate position I set a 3"x3" aluminum disc grouted into bed rock. The cap is stamped as shown in the diagram.

From which:

- A 5" diam. Juniper bears N24°E, 7.7 feet, marked X BT.
- A 5" diam. Juniper bears S41°E, 13.2 feet, marked XBT.
- A 21" diam. P. Pine bears S23°W, 89.2 feet, marked T13SR31ES6BT.
- A 21" diam. Juniper bears N45°W, 28.2 feet, marked T12SR31ES31BT.

I used a magnetic compass, with 18° east variation, to center of BT's and steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's.

Date: September 6, 2001

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 11TH day of SEPT., 2001.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)