


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: John B. David, Deputy Surveyor, under Contract No. 131, dated June 8, 1869.


Surveyor General Record States: Set stone 18x6x6 inches, for corner to sections 31 and 32.

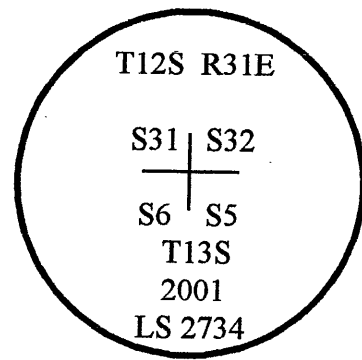

Description of corner evidence found:

No original evidence of this corner was found.

Found a 2½" alum. pipe, N02°22'07"E, 57.34 feet set by Douglas M. Ferguson, Survey No. 785. I do not accept this monument.

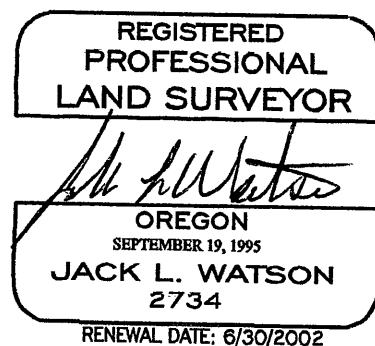

See Record Map of Survey No. 1601

Description of monument and accessories set at corner location:

At the position determined by single proportion I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 26 inches in the ground, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x30" iron pin bears N49°E, 26.4 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S43°E, 16.4 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S40°W, 29.1 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N57°W, 12.8 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a magnetic compass, with 18° east variation and steel tape to tie references.

Date: July 12, 2001

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 18TH day of JULY, 2001.
Robert R. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)