


History of original corner establishment:

Corner established in 1881 by Robb and Gradon under
General Land Office Contract No. 383.
Surveyor General Record states;

Set stone 15" x 10" x 6" in stone mound for $\frac{1}{4}$ section corner
from which;

A juniper 14" diameter bears N 85° W, 22 links dist.



No record of subsequent remonumentation was found in county records.
Description of corner evidence found:

Found marked stone, call size in a mound of stone, and BT.

See map of survey dated September, 1980.

Description of monument and accessories established to perpetuate the
original location of this corner:

In place of stone I set 2 $\frac{1}{2}$ " x 30" aluminum monument marked as shown 27" in ground
from which;

ORIGINAL BT

A 17" juniper bears N 85° W, 14.5 ft, to face BT, dying, scribes visible




NEW BTs

A 13" p pine bears S 44° E, 97.7 ft marked $\frac{1}{4}$ S2 BT

A 14" p pine bears S 16° W, 50.9 ft marked $\frac{1}{4}$ S3 BT

Buried stone south and alongside

Raised mound of stone

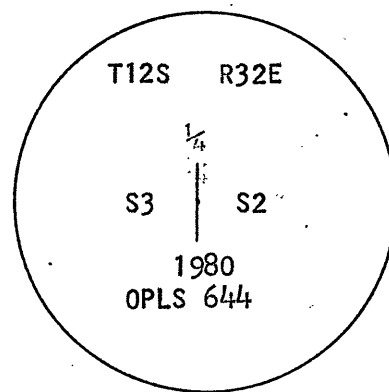

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass
with 15° East declination.
Measured to center of new B.T.s

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *31* day of..... *Oct* 19..... *80*
Robert D. Bayne by
(COUNTY OFFICIAL) (DEPUTY)