

History of original corner establishment:

Corner established in 1881 by Robb and Gradon under General Land Office Contract No. 383.
Surveyor General Record states;


Set stone 16" x 11" x 7" for corner to 6,7,1 and 12 from which;

A pine 6" diameter bears N 15° W, 25 links dist.

A pine 6" diameter bears N 75° E, 25 links dist.

A pine 8" diameter bears S 25° E 89 links dist.

A pine 14" diameter bears S 80° W, 33 links dist..



No record of subsequent remonumentation was found in county records.
Description of corner evidence found:

Found stone, call size, no marks seen, in a mound of stone, 2 BTs and remains of SE BT

See map of survey dated September, 1980.
Description of monument and accessories established to perpetuate the original location of this corner:

In place of stone I set 2 1/2" x 30" aluminum monument marked as shown, from which;

ORIGINAL BTs

A p pine stump bears N 1° W, 16.0 ft scribes visable

A 22" p pine bears S 78° W, 23.2 ft, live vigorus, scribes visable

NEW BTs



A 22" p pine bears N 75° E, 20.4 ft marked T12S R33E S6 BT

A 12" fir bears S 14° E, 48.4 ft marked T12S R33E S7 BT

A 9" fir bears N 61° W, 42.8 ft marked T12S R32E S1 BT

Buried stone south and alongside

Raised mound of stone

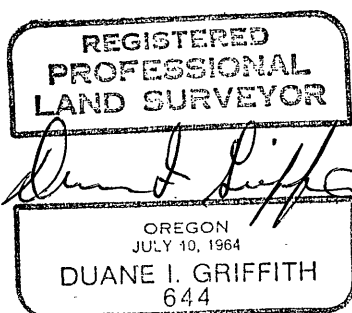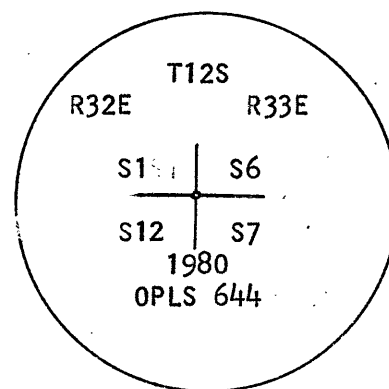

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass with 15° East declination.
Measured to center of new B.T.s

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*31*..... day of.....*Oct*....., 1980.....
Robert D. Bazzett..... by.....
(COUNTY OFFICIAL) (DEPUTY)