

History of original corner establishment:


Corner established in 1881 by Robb and Gradon under General Land Office Contract No. 383.

Surveyor General Record states;

Set stone 24" x 6" x 6" for $\frac{1}{4}$ section corner from which;

A pine 18" diameter bears N 75° E, 21 links dist.

A pine 36" diameter bears S 50° W, 48 links dist.



No record of subsequent remonumentation was found in county records.
Description of corner evidence found:

Found marked stone, call size in mound of stone and 2 BTs

See map of survey dated September, 1980.

Description of monument and accessories established to perpetuate the original location of this corner:

In place of stone I set 2 $\frac{1}{2}$ " x 30" aluminum monument marked as shown 28" in ground from which:



ORIGINAL BTs

A 24" p pine bears N 80° E, 13.9 ft to face of blaze, live vigorus, scribes visable


A 39" p pine bears S 49° W, 32.3 ft to center, no blaze evident, did not open, I blazed and marked this tree $\frac{1}{4}$ S13 BT

Buried stone south and alongside

Raised mound of stone

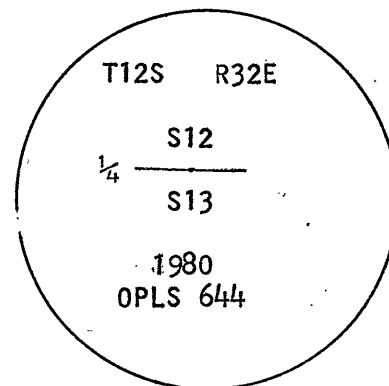

Signature of Duane I. Griffith



Brass washer nailed to BT blaze.
Used steel tape and magnetic compass with 15° East declination.
Measured to center of new B.T.s

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*31* day of.....*Oct*....., 1980
.....*Robert D. Baggett* by.....
(COUNTY OFFICIAL) (DEPUTY)