


History of original corner establishment:
Corner not set in original survey.

I established this $\frac{1}{4}$ corner at the intersection of lines from
opposite corresponding $\frac{1}{4}$ corners of this section.



No record of subsequent monumentation found in County records.
Description of corner evidence found:

None

See map of survey dated September, 1980.

Description of monument and accessories I established to perpetuate the
original location of this corner:


At intersection I set $2\frac{1}{2}$ " x 30" aluminum monument marked as shown 20" in ground
from which;

NEW BTs

A 8" juniper bears N 50° E, 5.4 ft marked $C\frac{1}{4}$ S13 BT.

A 10" p pine Bears S 23° E, 32.1 ft marked $C\frac{1}{4}$ S13 BT

Raised mound of stone

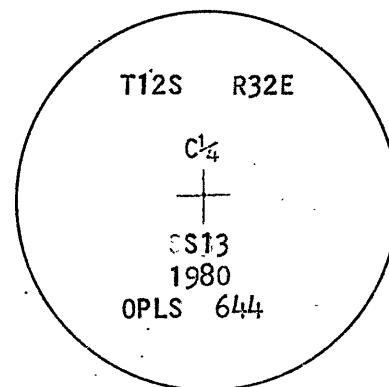

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane I. Griffith

OREGON
JULY 10, 1964
DUANE I. GRIFFITH
644

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass
with 15° East declination.
Measured to center of new B.T.s

Office of *Seamless* County of *Grant*
State of *Oregon* I hereby certify that the within instrument was filed in this office
for record on the *31* day of *Oct*, 19*80*
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

☆ GPO - 798-276

$\frac{42}{21}$

L-23