


History of original corner establishment:

Corner established in 1869 by John B. David under
General Land Office Contract No. 131.

Surveyor General Record states;

Set stone 15" x 9" x 8" for corner to sections 13,14,23 and 24.



No record of subsequent remonumentation was found in County records.

Description of corner evidence found:

Found marked stone 16" x 8" x 8" in mound of stone.

See map of survey dated September, 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set 2 1/2" x 30" aluminum monument marked as shown 27" in ground from which;

A 13" fir bears N 180° E, 27.6 ft marked T12S R32E S13 BT




A 10" fir bears S 87° E, 12.4 ft marked T12S R32E S24 BT

A 8" fir bears S 35° W, 21.1 ft marked X BT

A 10" fir bears N 23° W, 23.7 ft marked T12S R32E S14 BT

Buried stoned north and alongside

Raised mound of stone

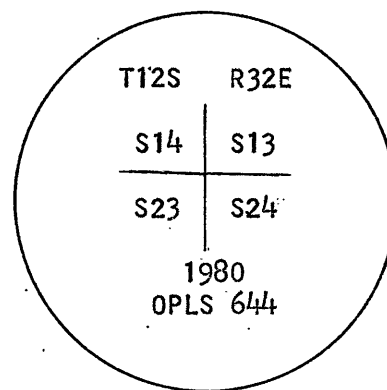

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass
with 15° East declination.
Measured to center of new B.T.s

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 31 day of Oct, 1980
Robert A. Beggs by _____
(COUNTY OFFICIAL) (DEPUTY)