


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established



Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At corner position, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New BTs

A 15 inch diameter P.Pine bears South 49° West 54.7 feet, marked CS1/16 S19 BT
A 11 inch diameter Red Fir bears North 49° West, 33.6 feet marked CS1/16 S19 BT



Raised mound of stone around new monument

Attached 54-9 signs and bearing tree tags to and painted a 6 inch red band around all bearing trees


Set steel fence posts approximately 5 feet West with 54-2 sign and approximately 5 feet East with 54-9 and 54-2 sign attached
Corner set October 21, 1983

Witnesses: Greg Blackman and Rick Robinson

See survey number 792

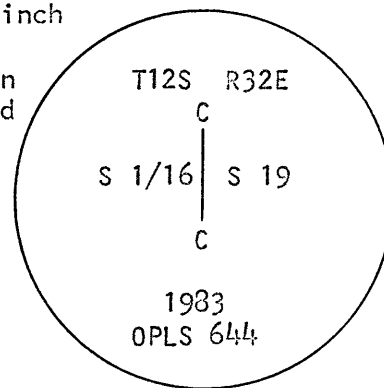

Duane I. Griffith



I used a steel tape and magnetic compass in the establishment of these accessories. I used 17½° East magnetic declination, and the distances to the new BTs are to the center of the tree. I attached a brass washer marked OPLS 644 by the BT blaze of the new BTs

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 30 day of Nov, 1983
Robert D. Byrnes by _____
(COUNTY OFFICIAL) (DEPUTY)