


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David under GLO contract number 131, dated June 8, 1869.

Surveyor General record states:

Set stone 18x10x10 for corner to Secs 24,25,19 & 30



Description of corner evidence found:

I found the stone, a 19x12x10 inch marked stone, loose on the ground near an old fence line. The area has been extensively logged. I have no doubt the stone has been disturbed. There is evidence of a fence line, quite old, running South and West from the proportioned position.

Description of monument and accessories I established to perpetuate the

original location of this corner: At proportionate distance, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:

New BTs



- A 16 inch diameter P.Pine bears North 52° East, 38.5 feet, marked T12S R32E S19 BT
- A 15 inch diameter Red Fir bears South 16° East, 35.8 feet, marked T12S R32E S30 BT
- A 18 inch diameter Red Fir bears South 38° West, 47.5 feet, marked T12S R31E S25 BT
- A 9 inch diameter Red Fir bears North 28° West, 55.5 feet, marked T12S R31E S24 BT

Buried the original stone North and alongside of the new monument
Set steel fence posts approximately 5 feet North with 54-2 sign
and approximately 5 feet West with 54-2 and 54-4 signs
Attached 54-4 signs and bearing tree tags to and painted a 6
inch red band around all bearing trees

Corner set October 21, 1983

Witnesses: Greg Blackman and Rick Robinson

See survey number 792 NOTE: I originally set this monument in the position of the stone and took BTs to this position. After realizing this was an erroneous position, I moved the monument to the proportionate position and chopped out the BTs referring to the erroneous position. I used a steel tape and magnetic compass in the establishment of these accessories. I used 17½° East magnetic declination, and the distances to the new BTs are to the center of the tree. I attached a brass washer marked OPLS 644 by the BT blaze of the new bearing trees.

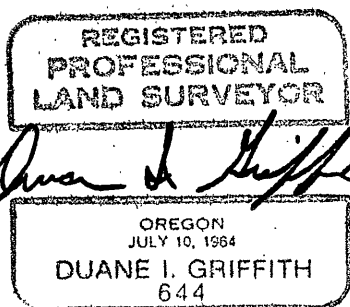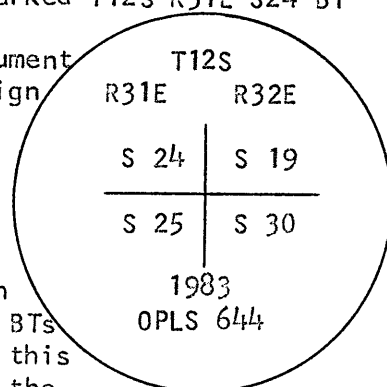

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*30*..... day of.....*Nov*....., 19.....*83*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)