


CORNER RESTORATION

NW corner
CORNER Sec. 29 TWP 12 S. RANGE 32 E., W.M.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

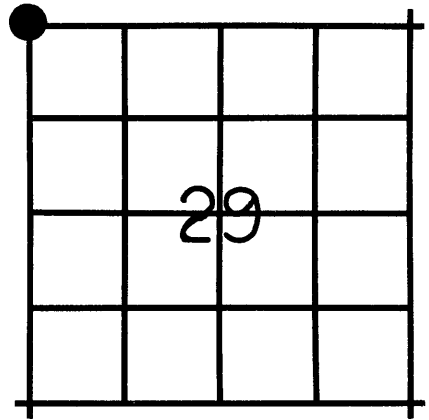

ORIGINAL DESCRIPTION:

Set stone 16x12x8 for corner to Secs. 19, 20, 29 and 30.

**RECEIVED AND
FILED**

AUG 29 1983

OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
Attest: *Mary Maulton*

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
J. L. Watson
Rance Kastor, witness

August 24, 1983

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Grant County Surveyor

EVIDENCE FOUND:

I found a volcanic stone 14x9x6 inches marked with 2 grooves on one face and 5 grooves on adjacent face lying on top of ground. It appears that someone has scratched a nail or some other object in the original marks. This stone was found by a Forest Service employee, and was shown to me by Rance Kastor, local rancher. I accept the position of this stone for the NW corner of Sec. 29, as it is harmoniously related to other known corners in the area.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

In place of the corner stone I set a 1½"x30" galvanized iron pipe 26" in the ground with attached brass cap marked as shown, from which I scribe
NEW BEARING TREES:

A yellow pine 15" diam., bears N. 10° E., 59.6 ft. dist. mkd. T12SR32E S20 CSBT
A yellow pine 5" diam., bears S. 41° E., 57.3 ft. dist., mkd. S29 CSBT.
A yellow pine 16" diam., bears S. 41° W., 49.7 ft. dist., mkd. T12S R32 E S30 CSBT.
A yellow pine 18" diam., bears N. 69° W., 64.3 ft. dist., mkd. T12SR32E S19 CSBT.

I buried the corner stone West and alongside the iron pipe. I used a magnetic compass with 20° E. variation and a steel tape measuring to the head of a large nail driven flush with the BT blaze at the root crown. I painted the blazes and a 6 inch band around all BTs with red timber marking paint and attached County Surveyor BT tags to the 4 BTs.

MONUMENT MARKED

