


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David, under GLO contract number 131, dated June 8, 1869.

Surveyor General record states:

Set stone 16x12x9 for corner to Secs 20,21,28 & 29



Description of corner evidence found:

Found marked stone of called size

Description of monument and accessories I established to perpetuate the



original location of this corner: In place of stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground, from which;

New BTS

- A 12 inch diameter P.Pine bears North 78° East, 103.9 feet, marked T12S R32E S21 BT
- A 13 inch diameter P.Pine bears South 12° East, 46.5 feet, marked T12S R32E S28 BT
- A 12 inch diameter Juniper bears South 45° West, 53.7 feet, marked T12S R32E S29 BT
- A 13 inch diameter Juniper bears North 54° West, 28.6 feet, marked T12S R32E S20 BT

Buried the original stone South and alongside of the new monument
Raised mound of stone around new monument
Attached 54-4 signs and bearing tree tags to and painted a 6 inch red band around all bearing trees
Set steel fence posts approximately 5 feet West with 54-2 sign and approximately 5 feet East with 54-2 and 54-4 signs attached
Corner set October 6, 1983

Witnesses: Greg Blackman and Rick Robinson
See survey number 792

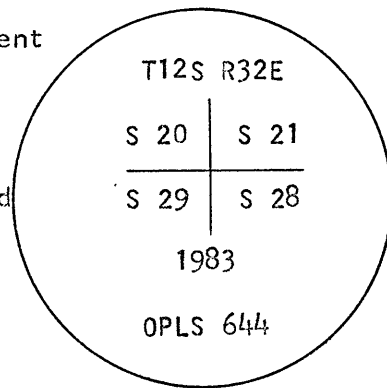

I used a steel tape and magnetic compass in the establishment of these accessories. I used 17½° East magnetic declination, and the distances to the new BTs are to the center of the tree. I attached a brass washer marked OPLS 644 by the BT blaze of the new bearing trees.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 30 day of Nov, 1983
Robert D. Boyer by _____
(COUNTY OFFICIAL) (DEPUTY)