


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by John B. David, under GLO contract number 131, dated June 8, 1869.

Surveyor General record states:

Set stone 15x9x7 for corner to Secs 21,22,27 & 28

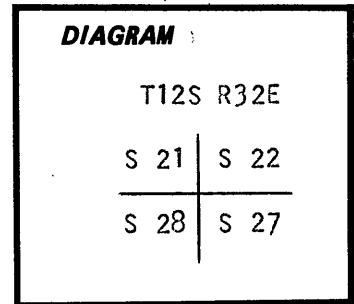

Description of corner evidence found:

Found marked stone of called size, firmly set

Description of monument and accessories I established to perpetuate the

original location of this corner: In place of stone, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 18 inches in the ground, from which:

New BTs

- A 8 inch diameter Juniper bears North 67° East, 60.1 feet marked X BT
- A 12 inch diameter P.Pine bears South 84° East, 84.0 feet marked T12S R32E S27 BT
- A 7 inch diameter P.Pine bears South 31° West, 55.7 feet, marked T12S R32E S28 BT
- A 6 inch diameter Mahogany bears North 72° West, 59.0 feet, marked T12S R32E S21 BT

Buried the original stone East and alongside of new monument

Raised mound of stone around new monument


Set steel fence posts approximately 5 feet West with 54-2 sign and approximately 5 feet East with 54-2 and 54-4 signs

Attached 54-4 signs and bearing tree tags to and painted a 6 inch red band around all bearing trees

Corner set October 6, 1983

Witnesses: Greg Blackman and Rick Robinson

See survey number 792

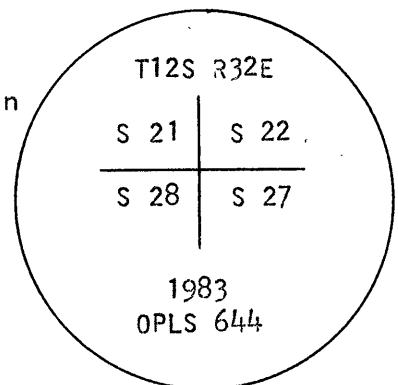

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Duane I. Griffith

OREGON
JULY 10, 1984
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 17½° East magnetic declination, and the distances to the new BTs are to the center of the tree. I attached a brass washer marked OPLS 644 by the BT blaze of the new bearing tree.

Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *30* day of..... *Nov* , 19..... *83*
Robert D. Baggett by
(COUNTY OFFICIAL) (DEPUTY)