


History of original corner establishment:
Corner established in 1869 by John B. David under
General Land Office Contract No. 131.
Surveyor General Record states;

Set stone 16" x 14" x 6" for corner of sections 24, 25, 19 & 30.

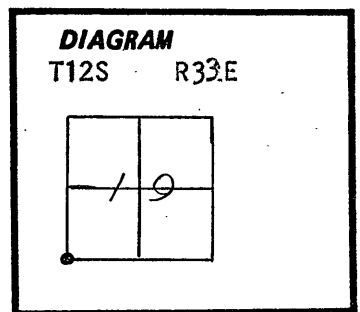

No record of subsequent remonumentation was found in County records.
Description of corner evidence found:

Found stone 17" x 16" x 6" with possible marks, too dim to be sure, alongside proportionate distance--see narrative on map of survey.

See map of survey dated September, 1980.

Description of monument and accessories I established to perpetuate the original location of this corner:

In place of stone I set 2 1/2" x 30" aluminum monument marked as shown 24" in ground from which;

NEW BTs

A 12" fir bears N 89° E, 20.4 ft marked T12S R33E S19 BT




A 9" fir bears S 48° E, 35.5 ft marked T12S R33E S 30 BT

A 12" fir bears S 74° W, 64.8 ft marked T12S R32E S 25 BT

A 15" p pine bears N 6° W, 13.2 ft marked T12S T32E S24 BT

Buried stone east and alongside

Raised mound of stone

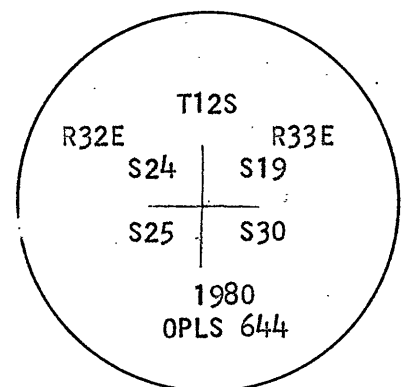

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass
with 15° East declination.
Measured to center of new B.T.s

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*31*..... day of.....*Oct*....., 19.....*80*.....
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)