

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No. A-13

History of original corner establishment:

Corner is originally established by Robb & Gradon, in 1881, under "General Land Office" Contract No. 383. Surveyor Generals Notes State: Set a post for cor. to Secs. 3,4,33 & 34

from which

A tamarack 11 in. dia., bears N80°E., 34 lks. dist.
 " fir 18 " " " S65°E., 42 " "
 " pine 10 " " " S50°W., 46 " "
 " " 3 " " " N25°W., 27 " "

In 1959, Howard Taylor set a stone at the corner position, as determined by him from record measure from original bearing trees. In 1959 Martin Louther described the work by Taylor, in his unrecorded notes.

Description of corner evidence found:

Found 16"x12"x7" stone , set in the ground with grooves on West face, as established by Howard Taylor in 1959, from record measure from original bearing Trees.

From Which:

Original Bearing Tree, a Lodgepole Pine, 10" dia., Bears N10°W., 15.8 ft., scribing reads S33 bt
 Original Bearing Tree, a Fir stump 26" dia., Bears S65°E., 27.7 ft., no scribe is visible.

Also found two trees as taken by Taylor. The work as performed by Taylor is described in unrecorded notes by Martin Louther.

Accepted the stone as set by Taylor as the corner as it gives the best overall fit from the original bearing trees and has been considered as the corner for the past 27 years.

Description of monument and accessories established to perpetuate the

original location of this corner:

Set 2-1/2"x30" aluminum pipe with 3-1/2" aluminum cap, stamped as shown on the **DIAGRAM**, SET 24" in the ground, set the stone as taken by Taylor North alongside the pipe.

From Which.

Tree as taken by Taylor, a lodgepole Pine 10" dia., Bears N11°W., 17.2 ft. scribing reads "S33 BT



Tree as taken by Taylor, a lodgepole Pine 8" dia., Bears N40°E., 14.4 ft. scribing reads "34 BT

New Trees:

A lodgepole Pine 7" dia., Bears S64°E., 15.8 ft., scribed: T12S R33E S3 BT
 A Tamarack 8" dia., Bears S47°W., 14.1 ft., scribed: T12S R33E S4 BT

Measurements to trees taken with a metal tape and magnetic compass, with Declination set off 20 deg. East.

Nailed a brass washer stamped PLS 848 on blaze above BT scribe, Bearing Tree Sign above blaze, and warning sign on back of each tree. Painted a 6" red band at breast ht. around each tree. Set steel fence posts with warning Sign, North 2 ft. from the corner.

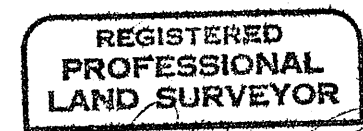

This work is performed by:
 Douglas M. Ferguson PLS 848
 Mt. Vernon Oregon.
 On: July 15, 1986
 Refer to Map of Survey No. 949

Office of.....*Surveyor*..... County of.....*Grant*.....
 State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
 for record on the.....*24*..... day of.....*Oct*....., 19.....*86*.....
*Robert D. Bugh*..... by.....
 (COUNTY OFFICIAL) (DEPUTY)

