


History of original corner establishment:

Corner established in 1881 by Robb and Gradon under
General Land Office Contract No. 383.
Surveyor General Record states;

Set a stone 18"x 12"x 6" in stone mound for $\frac{1}{4}$ section corner from
which;

A pine 36" diameter bears N 45° E, 11 links dist.



No record of subsequent remonumentation was found in county records.
Description of corner evidence found:

Found marked stone 18" x 10" x 6", in mound of stone and BT

See map of survey dated September, 1980.
Description of monument and accessories established to perpetuate the
original location of this corner:

In place of stone I set 2 $\frac{1}{2}$ " x 30" aluminum monument marked as shown 16" in ground
from which;

ORIGINAL BT

A 36" pine stump bears N 28° E, 9.9 ft to face of blaze marked $\frac{1}{4}$ S BT

NEW BTs



A 12" p pine bears N 21° E, 17.5 ft marked $\frac{1}{4}$ S6 BT

A 14" p pine bears S 65° E, 10.8 ft marked $\frac{1}{4}$ S7 BT

Buried stone south and alongside

Re

Raised mound of stone 3 ft at base to the top of monument

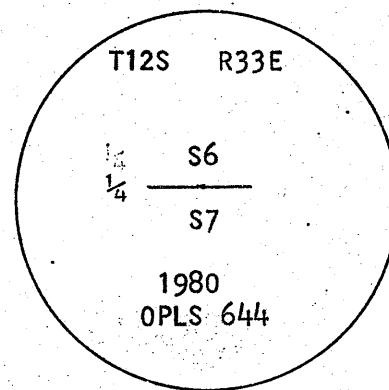

Brass washer nailed to BT blaze.
Used steel tape and magnetic compass
with 15° East declination.
Measured to center of new B.T.s

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*..... I hereby certify that the within instrument was filed in this office
for record on the.....*31*..... day of.....*Oct*....., 19.....*80*.....
Robert D. Bazett by.....
(COUNTY OFFICIAL) (DEPUTY)