


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1869 by John B. David under General Land Office Contract No. 131. Surveyor General Record states;

Set stone 15" x 12" x 9" for corner to sections 29, 30, 19, and 20.

Remonumented in 1965 by BLM in unrecorded survey by Lynn M. Roseberry.

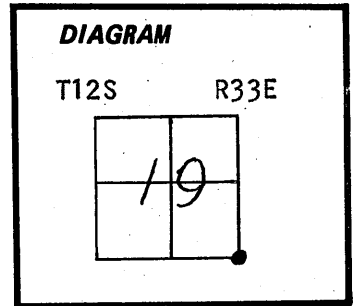

Description of corner evidence found:

Brass cap and BTs

See map of survey dated September, 1980.

Description of monument and accessories established to perpetuate the original location of this corner:

None

This information is copied from BLM field notes for public record.

Set an iron post, 28" long 2½" diameter, 24" in the ground with brass cap marked from which;


A pine, 14" diameter bears N 7 3/4° E, 205 links dist. marked T12S R33E S20 BT

A juniper, 8" diameter bears S 71° E 34 links dist. marked T12S R33E S29 BT

A pine, 13" diameter bears S 5½° W, 146 links dist. marked T12S R33E S30 BT

A juniper, 6" diameter bears N 48 3/4° W, 26½ links dist. marked T12S R33E S19 BT

Deposit corner stone alongside iron post.

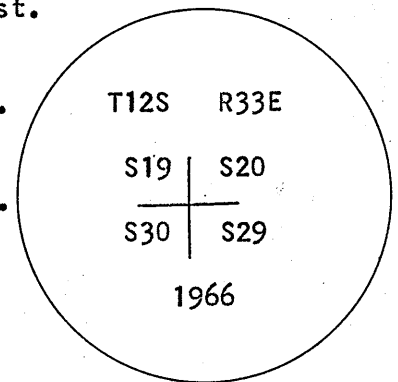

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
JULY 10, 1964
DWANE I. GRIFFITH
644

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 31 day of Oct, 1980
Robert D. Griffith by _____
(COUNTY OFFICIAL) (DEPUTY)