


CORNER RESTORATION

CORNER NE1/16
Sec. 16 TWP 12 S. RANGE 35 E., W.M.

ORIGINAL SURVEY BY: BAMFORD ROBB

CONTRACT NUMBER: 383

CONTRACT DATE: MARCH 26, 1881

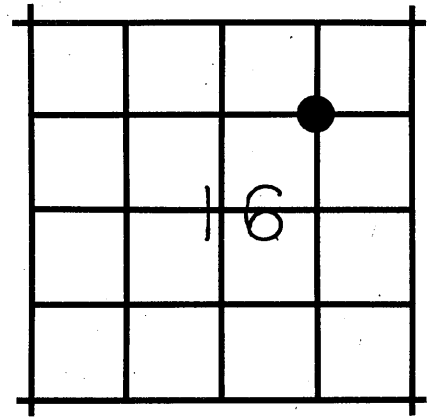

ORIGINAL DESCRIPTION:



Corner not previously established of record.

I established the NE 1/16 corner at the intersection of lines from opposite corresponding 1/16 corners of the NE 1/4 Sec. 16.

RECEIVED AND
FILED

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
F. Jackson
K. Leckenby



JUL 2 1979
John Liveira
JOHN LIVEIRA, County Clerk
By _____ Deputy

June 8, 1979

Grant County Surveyor.

EVIDENCE FOUND:

See Map of Survey No. 570.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:


Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set 5/8" iron pin in mound of stone from which I scribe

NEW BEARING TREES:

A 15" fir bears S. 14° E., 66.0 ft. mkd. NE1/16 S16CSBT.
An 18" pine bears S. 69° W., 29.8 ft. mkd. NE1/16 S16CSBT.
I used a compass with a 20° East variation and steel tape, measuring to center of the bearing trees.

MONUMENT MARKED

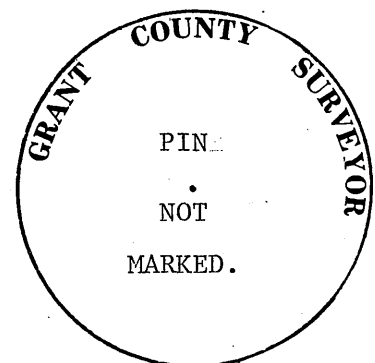

K-12