


CORNER RESTORATION

S.W. Corner
CORNER Sec. 16 TWP 12 S RANGE 35 E., W.M.

ORIGINAL SURVEY BY: BAMFORD ROBB

CONTRACT NUMBER: 383

CONTRACT DATE: March 26, 1881

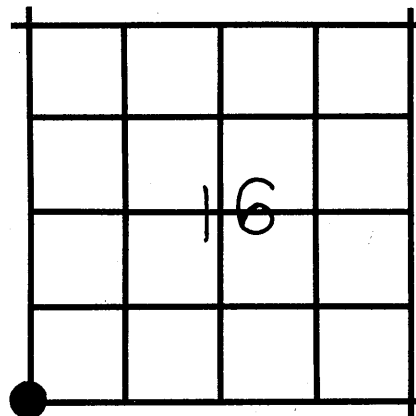

ORIGINAL DESCRIPTION:

North between Secs. 20 & 21:



80.00 set basalt stone 20x12x12 in mound of stone for corner to Secs. 16, 17, 20 & 21, from which:

A fir 12" in diam. bears N. 52° W., 41 lks. dist.

A fir 7" in diam. bears S. 65° E., 9 lks. dist.

RESTORATION BY, STAMP AND DATE.

R. D. Bagett
F. Jackson
K. Leckenby

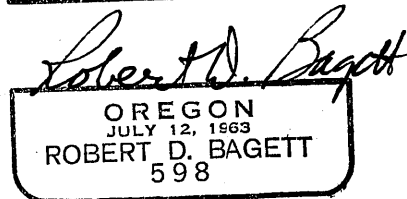

May 31, 1979

Grant County Surveyor

EVIDENCE FOUND:

Found the original stone a 20"x12"x12" basalt stone mkd. with 4 notches on E. edge and 3 notches on S. edge firmly set in mound of stone, from which:

ORIGINAL BEARING TREES:

A 16" fir bears S. 75° E., 9.5 ft. mkd. T12SR35 in partially open blaze.
The remains of a 12" fir stump bears N. 52° W., 27.6 ft. no marks.


See Map of Survey No. 570.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

I accept the position of the corner stone.
At the corner point: set 1½"x30" iron pipe 25" in the ground with brass cap marked as shown, from which I scribe
NEW BEARING TREES:
A 17" fir bears N. 37° E., 41.5 ft. mkd. T12SR35ES16CSBT
An 18" fir bears S. 45° E., 32.3 ft. mkd. T12SR35ES21CSBT
A 6" fir bears S. 60° W., 9.4 ft. mkd. S20CSBT
A 19" fir bears N. 34° W., 22.1 ft. mkd. T12SR35ES17CSBT
I buried the original corner stone West and
alongside the iron pipe and surrounded the pipe with a mound of stone. I used a compass with 20° East variation and steel tape, measuring to the center of the bearing trees.

MONUMENT MARKED

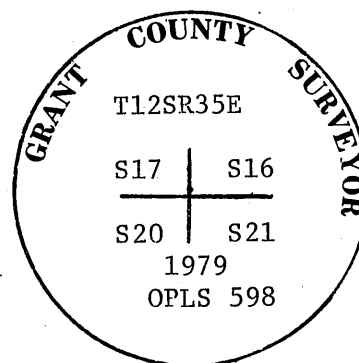

RECEIVED AND
FILED

JUL 2 1979
John Liveira
JOHN LIVEIRA, County Clerk
By _____ Deputy