CORNER RESTORATION

CORNER: C1/4 SEC. 36 TWP. 12 S. RANGE 26 E.

ORIGINAL SURVEY BY: CORNER

GROUP NUMBER: NOT PREVIOUSLY

DATE APPROVED: ESTABLISHED

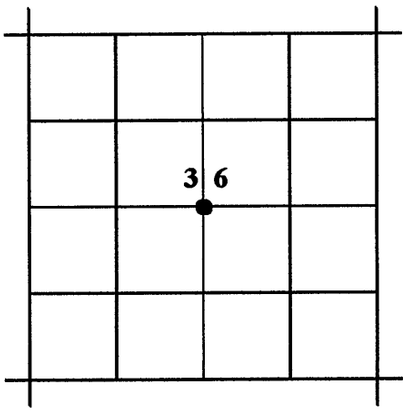

ORIGINAL DESCRIPTION: NONE

RESTORATION BY, STAMP AND DATE:

J.L. Hatfield, PLS
M.C. Springer, PLS

RECEIVED AND FILED

May 7, 2009

OFFICE OF COUNTY SURVEYOR

M.C. Springer

ATTEST: Jason L. Hatfield

REGISTERED PROFESSIONAL LAND SURVEYOR

Jason L. Hatfield

OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2011

May 5, 2009

EVIDENCE FOUND: NONE

See Record Survey No. 1865

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings including compass var.
At the corner point: I set a 5/8"x30" iron pin, 29" in the ground, with attached 2" diameter aluminum cap marked as shown.

From which I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°26'23"E, 24.42 ft., with attached alum. cap marked BMLS SURVEY MARKER RP 1 2009.

A 5/8"x30" iron pin, bears S35°13'26"E, 25.16 ft., with attached alum. cap marked BMLS SURVEY MARKER RP 2 2009.

A 5/8"x30" iron pin, bears S45°01'15"W, 25.04 ft., with attached alum. cap marked BMLS SURVEY MARKER RP 3 2009.

A 5/8"x30" iron pin, bears N33°22'43"W, 25.16 ft., with attached alum. cap marked BMLS SURVEY MARKER RP 4 2009.

BENCHMARK
T12S R26E
C1/4 ○ S36
2009
PLS 69454
LAND SURVEYING

Used RTK GPS to measure the RP's.