


CORNER RESTORATION

CORNER: SW COR. SEC. 25, TWP. 13 S., RANGE 26 E., W.M.

ORIGINAL SURVEY BY: Jason Owen

CONTRACT NUMBER: 194

CONTRACT DATE: July 1, 1873

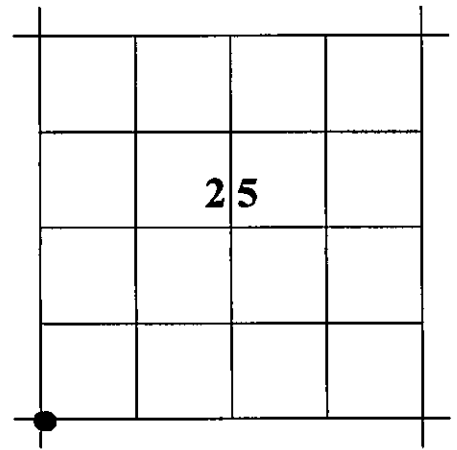

► **Subsequently surveyed by Walker and Fullerton, 1880**

ORIGINAL DESCRIPTION: "Set Stone 14x13x8 for cor to Secs 25, 26, 35 & 36. . . North online bet. Secs 25 & 26. . . 0.50 Spring branch 3 lks wide runs N.E. . ."

► Description from Walker & Fullerton retracement survey under contract no. 374, September 27, 1880: ". . . a basalt stone 24x10x8 planted 1 foot in ground . . . stands on a steep side hill facing North."

RESTORATION BY, STAMP AND DATE:

Michael C. Springer, PLS
Jason L. Hatfield, PLS

RECEIVED AND
FILED

REGISTERED
PROFESSIONAL
LAND SURVEYOR

JUNE 30, 2010

OFFICE OF COUNTY SURVEYOR

ATTEST: *Robert D. Dwyer*

OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2012

June 22, 2010 **SEE RECORD SURVEY NO. 1893**

EVIDENCE FOUND: I searched for, but did not find Owen's original monument or the monument placed by Walker and Fullerton. After a diligent search I determined this corner to be lost. I placed the new monument equidistant from the found monuments at the SE Corner of Section 25 and the SW Corner of Section 26 and approximately 33 feet south of the creek. I feel this position best represents the original location of this corner. See Record Survey No. 1893 for details on the positioning of this corner.

AT THE CORNER POINT: Set a 2½"x30" galv. iron pipe with attached 2½" brass cap 29" in the ground. Built a 2 foot mound of stone. Cap is marked as shown below.

FROM WHICH I MARK THE FOLLOWING BEARING TREES:

A juniper, 20 inch diam. bears N.79°E., 52.7 feet, marked "T13SR26ES25 BT"

A juniper 6½ inch diam. bears S.29°W., 40.7 feet, marked "X BT"

A juniper 20 inch diam. bears N.23°W., 23.3 feet, marked "T13SR26ES26 BT"

Attached BT tags to all bearing trees

ALSO FROM WHICH I SET THE FOLLOWING REFERENCE POINT:

A 5/8"x30" iron pin bears S.62°24'E., 24.44 feet. with attached 1½" aluminum cap marked "BMLS SURVEY MARKER RP1 2010"

Used magnetic compass with 17° East variation and a steel tape to measure to a 60d nail driven in the side center of the root crown of the BT's and RTK GPS to measure to the reference point.

STATE PLANE COORDINATES: (3601 OR N)

Reference Datum: NAD83

Northing: 269,962.8 ft.

Easting: 8,449,774.1 ft.

Ellip Ht: 2,801.9 ft.

