


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: W.H. Byars, Deputy Surveyor,
under Contract No. 197, dated July 4, 1873.

Surveyor General Record States: Set basalt stone 24x10x5
inches, for 1/4 section corner.


Survey 7G, by Vernon Glaze, dated June 18-July 30, 1914,
Established 1/4 common corner Sec. 5-4. Set iron post brass cap
marked and wooden post 4x4x4.0 scribed, set rock marked 1/4 CS
erected monument of stone.

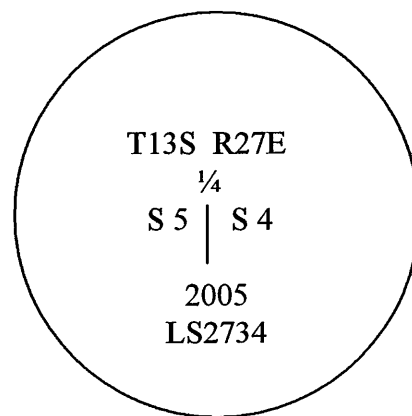

Description of corner evidence found:

No Evidence of the original corner stone was found.

The iron post set by Glaze was not found. No
evidence of the stone or wooden post was found.

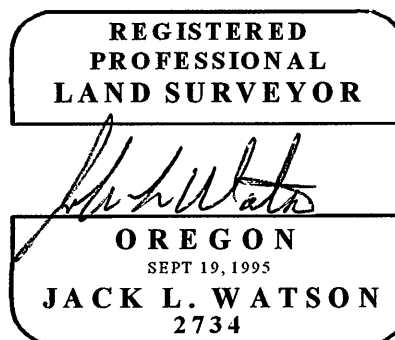

Renewal Date 6/30/2006

See Record Map of Survey No. 1745

Description of monument and accessories set at corner location:

At the position determined by single proportion, I set a 2 1/2"x30" aluminum pipe with 3 1/2"
aluminum cap, 30 inches in the ground, surrounded by stones. The cap is stamped as shown in the
diagram.

From which:

A 5/8"x30" iron pin bears N45°E, 11.39 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S27°E, 11.15 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S47°W, 14.45 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears N43°W, 14.96 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC

I used a steel tape and magnetic compass, with 18° E. declination.

Date: November 29, 2005

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 2 day of DEC, 2005.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)