

CORNER RESTORATION


CORNER: W1/4 SEC. 3 TWP. 13 S. RANGE 27E.

ORIGINAL SURVEY BY: William H. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

Subsequently remonumented by Vernon L. Glaze,
County Surveyor, in 1914. See Survey No. 7G.

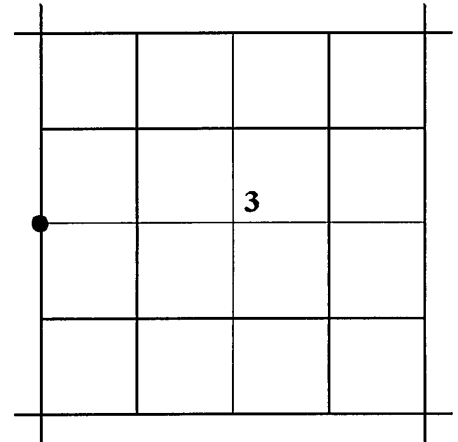

ORIGINAL DESCRIPTION: Set Basalt Stone 16x10x6 for the Quarter Section Corner.

Survey No. 7G states: common Gov 1/4 cor sec 4-3 set iron post Brass cap marked and wooden post 4x4x4.0 Scribed erected monument of Stone.

RESTORATION BY, STAMP AND DATE:


R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

MAR. 31, 2000
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *M.C. Springer*

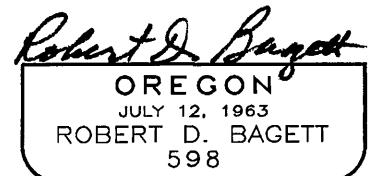

Renewal Date 12/31/01

March 15, 2000

Grant County Surveyor

EVIDENCE FOUND: Found Glaze's 1"x36" iron pipe with attached brass cap projecting about 5" out of the ground. The attached 2" brass cap is marked 1/4 in each quadrant, typical of other monuments and markings set by Glaze. Also found a basalt stone 17"x9"x8" lying loose 5 ft. southeasterly and downhill from Glaze's brass cap. The stone is marked 1/4 on one face. I accept Glaze's iron pipe and brass cap as the position of the quarter corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

Glaze's brass capped iron pipe is firmly set and in good condition. I leave it at the corner point for the position of the 1/4 corner.

From which I SCRIBE NEW BEARING TREES:

A Juniper 4" diam., bears N63'E, 54.2 ft. marked X CSBT.

A Juniper 18" diam., bears S76'E, 58.0 ft. marked 1/4 S3 CSBT.

A Juniper 5" diam., bears S14'W, 54.7 ft. marked X CSBT.

I SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears N76'W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 2000 OPLS 598.

The 1/4 corner is at the west side of a 10" Juniper fence post at the corner of fences running north and east.

I placed the original stone south and alongside Glaze's iron pipe and brass cap in a mound of stone 3 ft. base to top of cap. Used mag. compass with 18'E. var. and steel tape, measuring to a 50d nail driven in the side-center at the root crown of the BT's. Attached BT tags to BT's.