

CORNER RESTORATION


CORNER: E1/4 SEC. 3 TWP. 13 S. RANGE 27E.

ORIGINAL SURVEY BY: William H. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

Subsequently remonumented by Vernon L. Glaze, County Surveyor, in 1914. See Survey No. 7G. Subsequent accessories by Duane I. Griffith, OPLS No. 644, in 1968. See Survey No. 98.

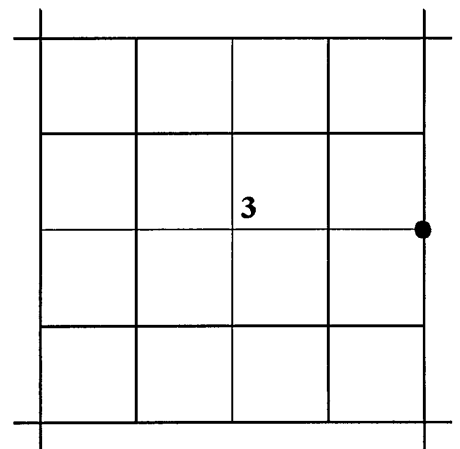

ORIGINAL DESCRIPTION: Set Basalt Stone 24x10x8 for the Quarter Section Corner.

Survey No. 7G states: return to common sec. cor 3-2 set iron post with Brass cap marked and wooden post 4x4x4.0 scribed. Erected monument of stone.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

MAR. 31, 2000
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST:

M.C. Springer

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/01

March 15, 2000

Grant County Surveyor

EVIDENCE FOUND: Found Glaze's 1"x36" iron pipe with attached brass cap set 15" in the ground in a mound of stones. The attached 2" brass cap is marked 1/4 in each quadrant, typical of other monuments and markings set by Glaze. Also found the original basalt stone 16"x9"x8" set south and alongside the iron pipe. The stone was inverted. I accept Glaze's iron pipe and brass cap as the position of the quarter corner,

From which:

A dead and standing Juniper 5" diam., bears S86°E, 96.1 ft. to face of blaze, marked 1/4S2 CSBT (Record Survey No. 98 map: S86°E, 96.3 ft.).

A Juniper 14"diam., bears S17°E, 126.1 ft. to face of blaze marked 1/4S2 CSBT (Record Survey No. 98 map: S18°E, 126.1 ft.).

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 28" in the ground, with attached Grant County Surveyor brass cap marked as shown.


From which I SCRIBE NEW BEARING TREES:

A Juniper 14" diam., bears N70°E, 61.0 ft. marked 1/4S2 CSBT.

A Juniper 9" diam., bears N62°W, 150.3 ft. marked 1/4S3 CSBT.

I SET A NEW REFERENCE POINT:

A 5/8"x24" iron pin, bears S70°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 2000 OPLS 598.

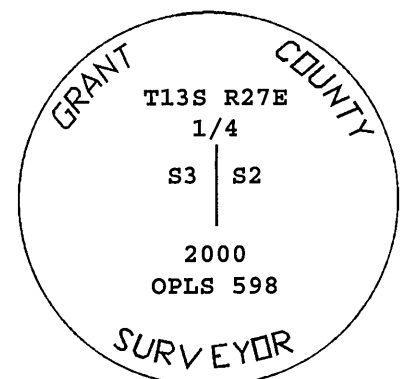

Buried original stone South and alongside iron pipe.

I cut Glaze's rusted iron pipe into 2 pieces and buried them North and alongside iron pipe.

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 18°E var. and steel tape, measuring to a 50d nail driven in the side-center at the root crown of the BT's. Attached BT tags to BT's.