

RECORD OF LAND CORNER MONUMENTATION


CORNER: S $\frac{1}{4}$ Cor. Sec. 6, T.13S., R.27E., W.M.

ORIGINAL SURVEY BY: W. Byars

CONTRACT NUMBER: 197 .

CONTRACT DATE: May 1, 1873

SUBSEQUENT SURVEY: Vernon L. Glaze 1917



ORIGINAL G.L.O. DESCRIPTION: Set boulder stone 14x8x6 for the Quarter Section corner.

1914 RESURVEY BY VERNON L. GLAZE, GRANT COUNTY SURVEYOR DATED 1914:

set iron post with Brass cap marked and wooden post 4x4x4.0 Scribed erected monument of stone.

EVIDENCE FOUND: Found 1" iron post with 2" brass cap with markings typical of a Vernon Glaze monument, protruding 4" above ground, in a 2 ft. mound of stone. An E-W fence lies approx. 3-4 ft. N. of corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

Set a 3 ft. steel u-post with attached location tag next to corner.


FROM WHICH, I set the following reference points:

A 5/8" x 20" iron pin, driven to bedrock, bears N.26°28'E., 10.33 ft., with attached green plastic cap marked GCS RP.

A 5/8" x 15" iron pin, driven to bedrock, bears S.61°39'E., 6.86 ft., with attached green plastic cap marked GCS RP.

A 5/8" x 30" iron pin bears S.25°44'W., 16.99 ft., with attached green plastic cap marked GCS RP.

A 5/8" x 30" iron pin bears N.31°48'W., 6.18 ft., with attached green plastic cap marked GCS RP.

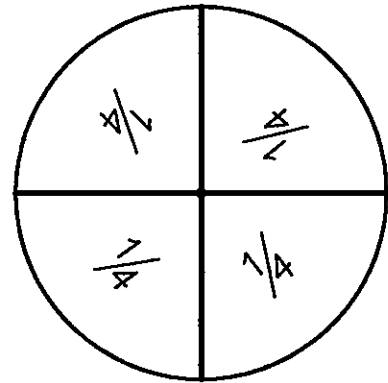

Used RTK GPS to measure RP's. Bearings to RP's are based on Record Map of Survey No. 2063 filed in the Grant County Surveyor's Office.

STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 291,383.1 ft.

Easting: 8,457,655.9 ft.

Ellip. Ht: 2,500.6 ft.

RESTORATION BY:

Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician

217 N. Canyon Blvd.
John Day, OR, 97845
(541) 575-1251

Surveyed January 25, 2017

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

FEB 3 2017

BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2018