


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original corner established by: W.H. Byars, Deputy Surveyor,
under Contract No. 197, dated July 4, 1873.

Surveyor General Record States: Set basalt stone 18x14x4 inches,
for the corner to sections 4-5-8 and 9.

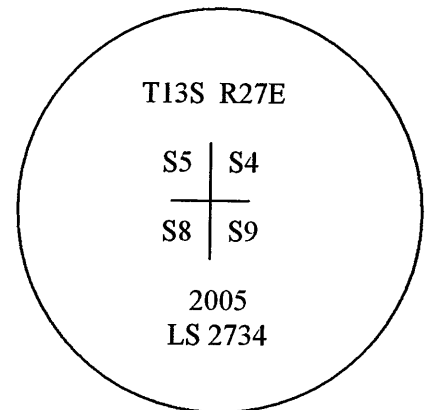

Description of corner evidence found:

Found stone 18x16x4 inches, set upright 6" in the ground
in a ring of stones, marked with 5 notches on the south
edge, no other marks were found.

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

[Signature]
OREGON
SEPT 19, 1995
JACK L. WATSON
2734

Renewal Date 6/30/2006

See Record Map of Survey No. 1745

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 2½"x30" aluminum pipe with
3½" aluminum cap, 20 inches in the ground, surrounded by a mound of stone. Placed original
marked stone north alongside pipe. The cap is stamped as shown in the diagram.

From which:

A 4" Juniper bears S50°W, 17.2 feet, marked X BT.

A 9" Juniper bears N9°W, 50.0 feet, marked T13SR27ES5BT.

A 5/8"x30" iron pin bears N49°E, 19.54 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

A 5/8"x30" iron pin bears S52°E, 7.35 feet, with attached red plastic cap
marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's
and magnetic compass, with 18° E. declination.

Date: November 29, 2005

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 2 day of DEC, 2005.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)