

CORNER

RESTORATION


CORNER: SW Sec 7 TWP. 13S. RANGE 27E.

ORIGINAL SURVEY BY: W. H. Byars

CONTRACT NUMBER: 185

CONTRACT DATE: May 7, 1873

Subsequently resurveyed & remonumented by
Vernon L. Glaze, County Surveyor, in 1914.
See Survey Record Book 1 Page 82.

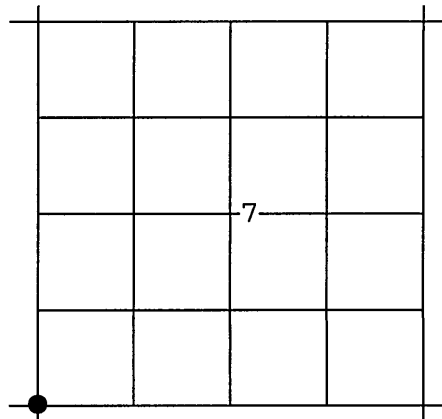

ORIGINAL DESCRIPTION: Set corner to Secs. 7, 12, 13, & 18.

Glaze's record: common Gov. cor. sec. 12-7-13-18 T13-R26-27E set iron post with Brass cap marked wooden post 4x4x4.0 Scribed erected monument of Stone.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

MAY 4, 1998
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: Steven D. Follweiler

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

RENEWAL DATE 12/31/99

April 6, 1998

Grant County Surveyor

EVIDENCE FOUND: Found Glaze's 1 1/4"x18"iron pipe with attached brass cap appropriately marked 7, 18, 12, 13. This monument was out of the ground and wired to a rock crib in a N-S fenceline.

I found this monument in May, 1970. It was set but leaning, most of the pipe above ground. At that time I set a nail at the base of the pipe where it entered the ground. Since then the pipe has been removed and wired to the rock crib 1 1/2 ft. SW of the corner position. We found the nail that I set in 1970 and verified that position from our local control points that we found from our earlier work. I accept the nail as the position of the corner.

Brass cap is set in a fenceline running North and South.
Cummings Ditch is approximately 40 ft. North of corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1 1/2"x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:


A Multi-trunk Juniper, the NW trunk being 12"diam., bears N32°E, 48.2 ft. marked X CSBT. (in N-S fenceline)

A Multi-trunk Juniper, the SW trunk being 3"diam., bears S37°E, 121.8 ft. marked X CSBT.

A Juniper 7"diam., bears S78°W, 203.8 ft. marked T13S R26E S13 CSBT.

A Juniper 8"diam., bears N26°W, 80.9 ft. marked T13S R26E S12 CSBT.

MONUMENT MARKED

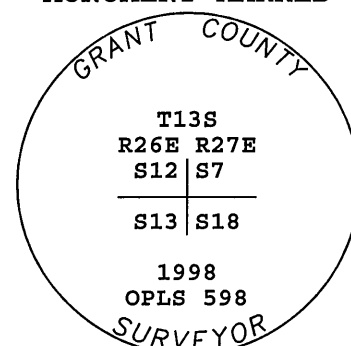

Buried Glaze's monument south and alongside iron pipe, raised a mound of stone 1 1/2 ft. base to top of cap. Used mag. compass with 18°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.