


CORNER RESTORATION

CORNER: NW SEC. 16 TWP. 13 S. RANGE 28E.

ORIGINAL SURVEY BY: William H. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

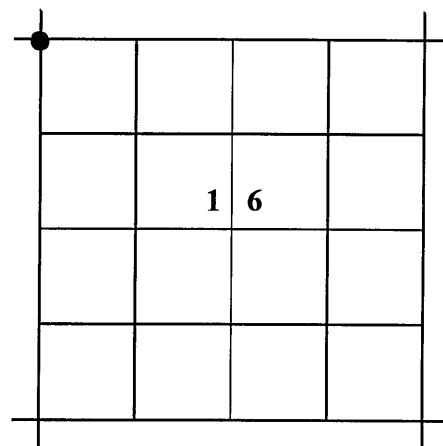

Subsequently remonumented by Vernon L. Glaze, County Surveyor, in 1914. See Survey No. 7G.

ORIGINAL DESCRIPTION: Set Conglomerate Stone 21x6x6 for the Corner to Sections 8.9.16 & 17.

Survey No. 7G states: Common Gov. sec's cor. 8-9-17-16 set iron post with Brass cap marked and wooden post 4x4x4.0 Scribed. erected monument of stone.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

FEB. 24, 2000
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/01

February 3, 2000

Grant County Surveyor

EVIDENCE FOUND: Found Glaze's 1"x36" iron pipe badly rusted with attached brass cap set 5" in the ground in a mound of stones with the brass cap marked in quarters with the appropriate section numbers in the quarters. Also found a conglomerate stone 28"x6"x6" marked with 4 notches on one edge, 4 notches on the opposite edge and a 2" cross on top South and alongside the iron pipe. The mound of stones is 18" high with a 4 ft. base. I accept Glaze's iron pipe and brass cap as the position of the section corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 30" in the ground, with attached Grant County Surveyor brass cap marked as shown.


From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR
RP 1 2000 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR
RP 2 2000 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR
RP 3 2000 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR
RP 4 2000 OPLS 598.

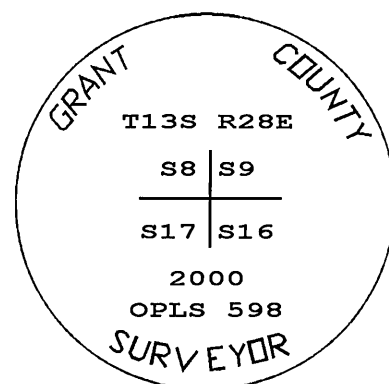

Buried original stone North and alongside galv. iron pipe. I cut Glaze's iron pipe in two pieces and buried them South and alongside galv. iron pipe. Repaired the mound of stone 4 ft. base to 18" over the top of cap. Used mag. compass with 18' var. and steel tape.