


CORNER RESTORATION

CORNER: W1/4 SEC. 15 TWP. 13 S. RANGE 28E.

ORIGINAL SURVEY BY: William H. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

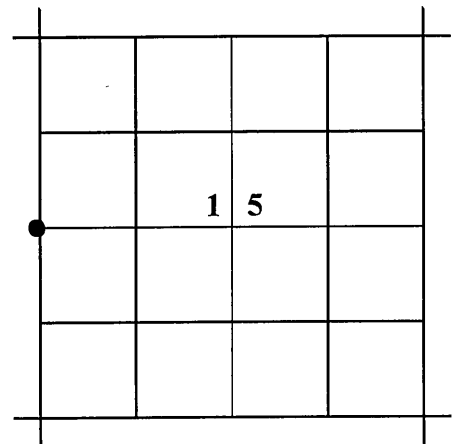

Subsequently remonumented by Vernon. L. Glaze,
County Surveyor, in 1914. See Survey No. 11G.

ORIGINAL DESCRIPTION: Set Basalt Stone 18x6x5 for the Quarter Section
Corner.

Survey No. 11G states: set at E 1/4 cor sec 16-15 thence.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
M.C. Springer

RECEIVED AND
FILED

FEB. 24, 2000
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Steven D. Follweiler*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Renewal Date 12/31/01

February 7, 2000

Grant County Surveyor

EVIDENCE FOUND: Found Glaze's 1" iron pipe with attached brass cap firmly set protruding 4" above ground in a mound of stones. The attached 2" brass cap is marked 1/4 in each quadrant, typical of other monuments and markings set by Glaze. Also found the original basalt stone 20"x9"x5" marked 1/4 on one face laying loose at the south edge of the mound of stones. I accept Glaze's iron pipe and brass cap as the position of the quarter corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings including compass var.

The iron pipe and brass cap set by Glaze is in good condition at the corner point.

From which I SCRIBE NEW BEARING TREES:

A two-trunked Juniper, bears N8°E, 18.9 ft.
marked 1/4 S15 CSBT on the east trunk 5" diam.
A Juniper 5"diam., bears N85°W, 39.1 ft.
marked 1/4 S16 CSBT.

Also I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears S85°E, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR
RP 1 2000 OPLS 598.
A 5/8"x30" iron pin, bears S8°W, 25.00 ft., with
attached alum. cap marked GRANT COUNTY SURVEYOR
RP 2 2000 OPLS 598.

The quarter corner is located in a North-South fence.

I deposited the original marked stone northeasterly and alongside the iron pipe and brass cap in the repaired mound of stone with 3 ft. base to top of cap. Used mag. compass with 18' var. and steel tape, measuring to a 50d nail driven in the side-center at the root crown of the BT's. Attached BT tags to BT's.