

CORNER RESTORATION


CORNER: E $\frac{1}{4}$ Sec 21 TWP 13S. RANGE 28E.

ORIGINAL SURVEY BY: Wm. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

Subsequently remonumented by Robert D. Bagett, County Surveyor, June 9, 1980, See corner restoration records.

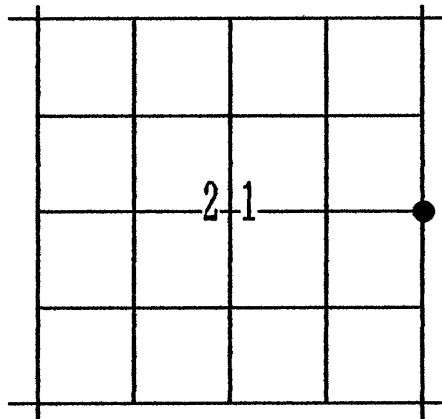

ORIGINAL DESCRIPTION: Set basalt stone 12x10x6 for the quarter section corner.

I found the original stone in 1980, my record states:

Set a 1 $\frac{1}{2}$ "x30" galvanized iron pipe 16 inches in the ground with brass cap marked as shown. (marks shown below).

From which I scribe NEW BEARING TREES:


A Juniper 10 inches in diameter bears N.43°E, 96.6 ft. marked $\frac{1}{4}$ S22 CSBT.

A Juniper 13 inches in diameter bears N.6°W, 86.2 ft. marked $\frac{1}{4}$ S21 CSBT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED
6-1-95
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: *Jeremy Russell*

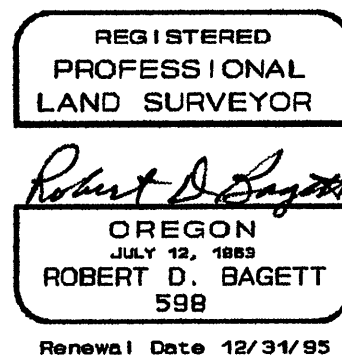

April 11, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{2}$ " iron pipe with a 2 $\frac{1}{2}$ " Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

From which:

A Juniper 14" diam., bears N45°E, 96.6 ft. with partially healed over blaze, scribing visible.

A Juniper 14" diam., bears N3°W, 86.2 ft. with partially healed over blaze, scribing visible.

Corner is in a fence running North and South, and 45' North of corner of fences running North, South, and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1980 is in good condition.

From which: I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR
T13S R28E
 $\frac{1}{4}$
S21 | S22
1980
OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.