

CORNER RESTORATION


CORNER: S¼ Sec 21 TWP 13S. RANGE 28E.

ORIGINAL SURVEY BY: Wm. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

Subsequently resurveyed & monumented by
Robert D. Bagett, County Surveyor, June 5, 1980,
See corner restoration records.

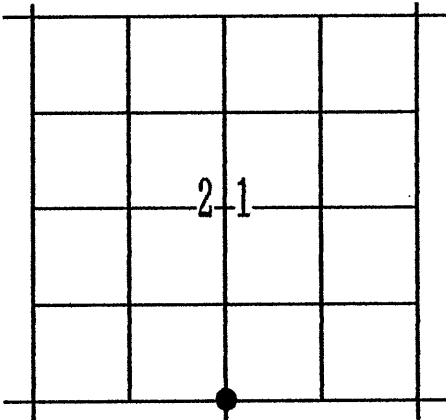

ORIGINAL DESCRIPTION: Set basalt stone 15x10x4 for the quarter section corner.

I did not find the original stone in 1980, my record states:

I did not find the original ¼ corner stone or any evidence of its position. The corner position falls on hillside that has been logged and farmed, the corner stone was probably destroyed due to these operations. I therefore set the corner at single proportionate measure between the found SE and SW corners of Sec. 21.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED
6-1-95
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: *Gerry Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

April 11, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

From which:
A Juniper 14"diam., bears N13°E, 76.6 ft. with partially healed blaze, scribe visible.
The BT in the SE quadrant has been destroyed.

Corner is S20°W., 53' from corner of fences running North and East.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1980 is in good condition. MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:	GRANT COUNTY SURVEYOR
A 5/8"x30" iron pin, bears S45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.	T13S R28E
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.	S21 ¼
A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.	S28 1980 OPLS 598

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.