

CORNER RESTORATION


CORNER: SE Sec 21 TWP 13S. RANGE 28E.

ORIGINAL SURVEY BY: William Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

Subsequently remonumented by Robert D. Bagett, County Surveyor, May 30, 1980, See corner restoration records.

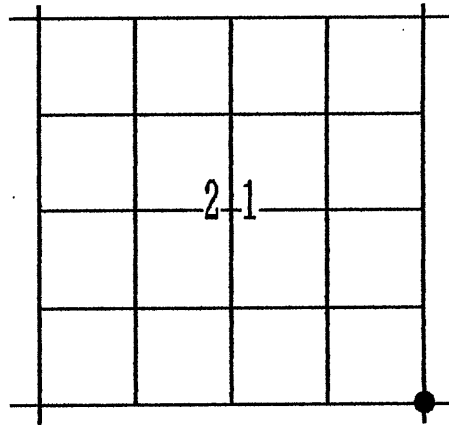

ORIGINAL DESCRIPTION: Set basalt stone 18x12x12 for the corner to Sections 21, 22, 27 and 28.

I found the original stone in 1980, my record states:
At the corner point: Set 1½"x30" galvanized iron pipe 26 inches in the ground with brass cap marked as shown. (marks shown below).

From which I scribe NEW BEARING TREES:

A 9" Juniper bears N34°E, 139.5 ft. marked T13SR28ES22CSBT.

A 15" Juniper bears S14°E, 65.4 ft. marked T13SR28ES27CSBT.

A 14" Juniper bears S81°W, 87.7 ft. marked T13SR28ES28CSBT.

A 12" Juniper bears N27°W, 187.7 ft. marked T13SR28ES21CSBT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED

6-1-95
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett
ATTEST: *Jeremy Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

April 12, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1½" iron pipe with a 2½" Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

From Which:

A Juniper Stump 9" diam., bears N34°E, 139.5 ft. with partially healed blaze, scribe visible.

A Juniper 18" diam., bears S12°E, 65.8 ft. with partially healed blaze, scribe visible.

A Juniper 18" diam., bears S82°W, 87.6 ft. with partially healed blaze, scribe visible.

A Juniper 16" diam., bears N25°W, 186.4 ft. with partially healed blaze, scribe visible.

Corner is 33' east of corner of fences running North and West.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1980 is in good condition.

From which: I SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR
T13S R28E

S21	S22
S28	S27
1980	
OPLS 598	

Repaired mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.